

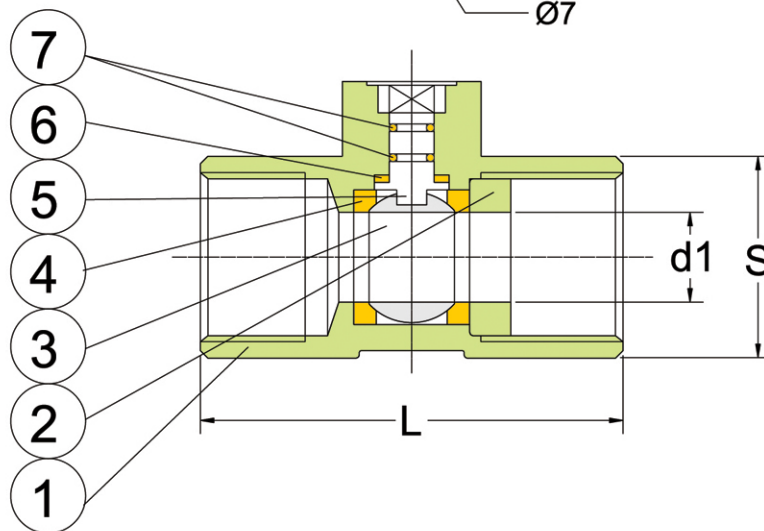


- 防爆中軸BLOW-OUT PROOF STEM
- 工作壓力WORKING PRESSURE(CWP):
DN8~DN50 1000psi (PN 63bar)
- 適用溫度範圍 TEMPERATURE RANGE: -20 to 180°C
- 管螺紋參照 PIPE THREAD IN ACCORDANCE
ANSI B1.20.1(NPT)
DIN 259/DIN 2999
ISO 228
BSP
PT

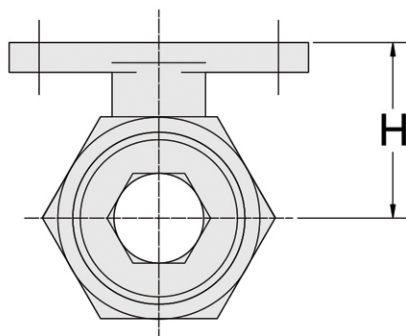

MATERIALS LIST

NO	零件名稱	PART	材質 MATERIAL	Q.TY
1	本體	BODY	SUS 316	1
2	側蓋	CAP	SUS 316	1
3	鋼球	BALL	SUS 316	1
4	球墊	SEAP	PTFE	1
5	中軸	THRUST WASHER	PTFE	1
6	小薄片	STEM	SUS 316	1
7	O型環	O RING	VITON	2

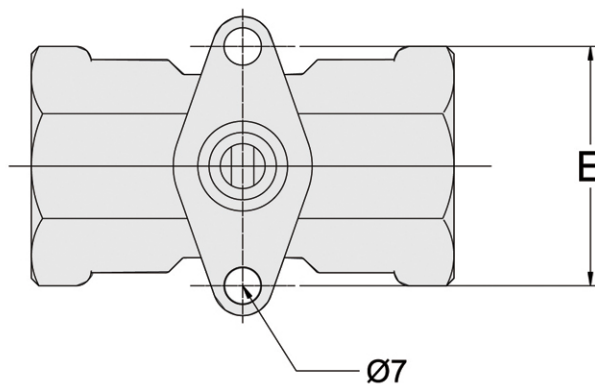

DIMENSIONS

unit:mm

SIZE	d1	L	H	E	S
1/4"	5.0	39.0	26.0	38.5	17
3/8"	7.2	44.0	27.0	38.5	19
1/2"	9.2	56.5	26.5	38.5	25
3/4"	12.5	59.0	28.5	38.5	32
1"	15.0	71.0	32.5	38.5	38
1-1/4"	20.0	78.0	36.0	38.5	49
1-1/2"	25.0	83.0	41.5	38.5	53
2"	32.0	100	47.0	38.5	64