



- 連接方式END CONNECTIONS:牙口/套焊/對焊
THREADED END, SOCKET WELD END, BUTT WELD END
- ISO 5211平臺直接安裝 ISO 5211 DIRECT MOUNTING PAD
- 防爆中軸BLOW-OUT PROOF STEM
- 工作壓力WORKING PRESSURE(CWP):
DN8~DN50 1000psi
DN65~DN80 800psi
- 適用溫度範圍 TEMPERATURE RANGE: -20 to 180°C
- 掛鎖裝置 LOCKING DEVICE
- 管螺紋參照 PIPE THREAD IN ACCORDANCE
ANSI B1.20.1(NPT)
DIN 259/DIN 2999
ISO 228

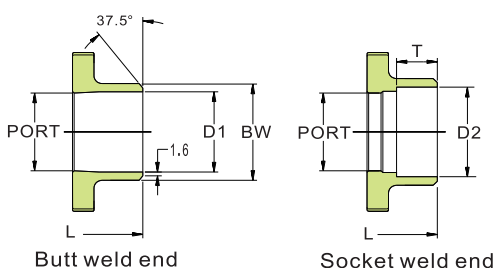

MATERIALS LIST

NO.	零件名稱	PART NAME	MATERIAL
1	本體	BODY	ASTM A351 Gr.CF8M
4	鋼球	BALL	ASTM A351 Gr.CF8M
5	中軸	STEM	SS316
9	側蓋	END CAP	ASTM A351 Gr.CF8M
12	球墊	SEAT	RTFE.
13	小薄片	THRUST WASHER	RTFE.
14	中口	STEM PACKING	RTFE.
15	鐵圈	GLAND BUSH	SS304
19	把手	HANDLE	SS304
21	膠套	HANDLE COVER	VINYL GRIP
22	下螺帽	STEM NUT	SS304
24	上螺帽	HANDLE NUT	SS304
28	鎖片	LOCKING PAD	SS304
29	盤型華司	BELLEVILLE WASHER	SS304-CSP
30	防松華司	TAB WASHER	SS304
31	O型環	O-RING	VITON
32	抗磨片	PACKING FOLLWER	PTFE.+25%G.F.
35	螺絲	BODY BOLT	SS304
36	彈簧華司	BOLT WASHER	SS304
37	螺帽	BOLT NUT	SS304

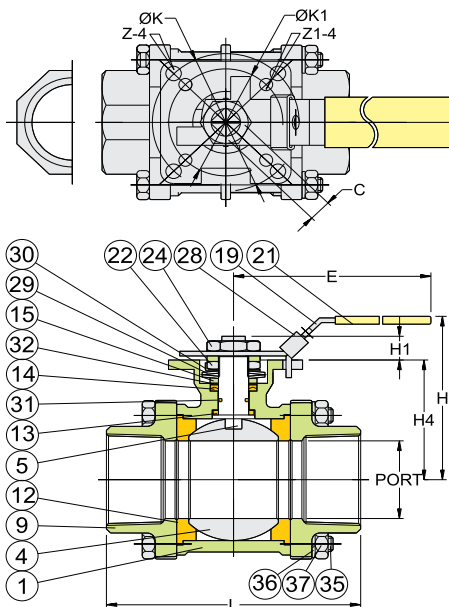

DIMENSIONS

Unit:mm

SIZE	PORT	L	L	E	H	H1	H4	C	K	K1	Z-4	Z1-4	D1	BW	D2	T	
DN8	1/4"	11.5	63.5	58.5	112.0	73.0	8.5	37.0	9.0	50.0	36.0	7.0	6.0	11.0	13.7	14.2	10.0
DN10	3/8"	12.5	63.5	63.5	112.0	73.0	8.5	37.0	9.0	50.0	36.0	7.0	6.0	12.5	17.1	17.5	10.0
DN15	1/2"	15.0	63.5	75	112.0	73.0	8.5	37.0	9.0	50.0	36.0	7.0	6.0	15.8	21.3	21.8	10.0
DN20	3/4"	20.0	72.5	80	112.0	80.8	8.5	45.0	9.0	50.0	36.0	7.0	6.0	20.9	26.7	27.4	13.0
DN25	1"	25.0	81.0	90	136.0	90.5	11.4	53.5	9.0	50.0	36.0	7.0	6.0	26.6	33.4	34.1	13.0
DN32	1-1/4"	32.0	94.5	110	185.0	98.7	11.4	59.0	9.0	50.0	36.0	7.0	6.0	35.1	42.2	42.7	13.0
DN40	1-1/2"	38.0	108.0	120	197.9	115.3	14.0	74.8	14.0	70.0	50.0	9.0	7.0	40.9	48.3	49.0	13.0
DN50	2"	50.0	121.5	140	197.9	124.0	13.7	83.5	14.0	70.0	50.0	9.0	7.0	52.5	60.3	61.0	16.0
DN65	2-1/2"	65.0	157.5	185	267.0	155.0	18.0	108.8	17.0	102.0	70.0	11.0	9.0	62.7	73.0	77.0	16.0
DN80	3"	80.0	190.0	205	267.0	208.5	18.0	118.3	17.0	102.0	70.0	11.0	9.0	77.9	88.9	90.2	16.0
DN100	4"	100.0	225.0	240	322.0	216.7	18.0	153.8	17.0	102.0	70.0	11.0	9.0	102.3	114.3	115.3	22.0